


Ultimaker 2+ Quick Specs

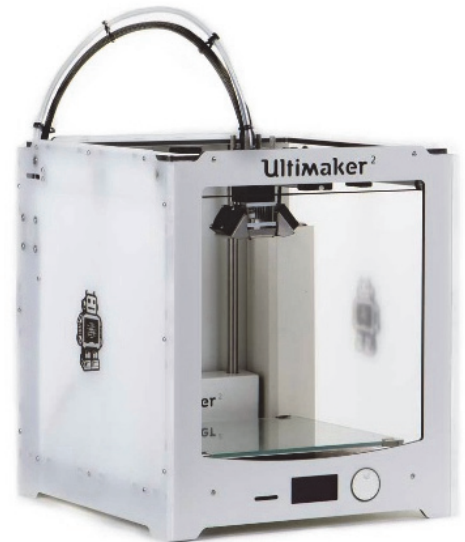

Layer Resolution	Up to 20 micron (0.02mm)
Build Volume	230 x 225 x 205 mm
Speed	30 - 300 mm/sec
Print Surface	Heated bed, 20 - 100 C
Nozzle Temperature	180 - 260 C
Nozzle Diameter	0.25, 0.4, 0.6, 0.8mm
Filament Diameter	2.85mm
Supported Filaments	PLA, ABS, CPE
Printing Software	Cura (Download)
Overall Size	357 x 342 x 388 mm
File Transfer	Standard SD card
Print Technology	Fused Filament Fabrication (FFF)
What's Included	Ultimaker 2+ Printer Australian power cord Power supply USB cable (for firmware upgrades) 0.75kg filament spool SD card Glass build plate Glue stick User manual Grease & Hex wrench Filament spool spigot & Filament guide post
Optional Accessories	Redstack Front Cover (for ABS printing) Redstack Ultimaker Advanced Stand